

## iS-O Series

### Compact Subwoofer

1 x 15" Neodyme (3" voice coil)  
Bass Reflex  
IP54

### Features

Minimum height and width  
Accuracy in low frequency reproduction  
Sonic impact and precision

### Applications

Very compact mobile system  
Unobtrusive in fixed installations  
Stage monitoring drum fill

### Specifications

42 Hz - 120 Hz @ -10dB  
138 dB SPL Max @1m  
900 W AES - 8 ohms

The iS115-O is an extremely compact and efficient subwoofer for either fixed installations or mobile applications. It features a single 15" neodymium cone driver. This exclusive design significantly reduces the volume of the acoustic load in order to obtain the best size / low cutoff frequency ratio as well as a significant efficiency gain in terms of useable bandwidth and perfect membrane movement control. This driver takes advantage of a forced thermal cooling, which drastically reduces thermal compression, resulting in high sound pressure capacity.

# iS 115-O



Subwoofer iS115-O

Thanks to its refined cabinetry facilitating the flow of water, the iS115-O is a subwoofer optimized for the sound reinforcement of fixed installation projects outdoors.

In order to maintain its appearance and performance for many years, the iS115-O subwoofer is covered with black polyurethane paint and has a magnelis steel grille.

The iS115-O is designed for low frequency reinforcement of small to medium power sound systems where space is at a premium.


The iS115-O's offers low frequency from 40Hz for maximum precision even in difficult acoustic environment. The total efficiency gain resulting from both the acoustic load and the forced venting technology is about 3dB of sound pressure.

The iS115-O is therefore an ideal choice for applications where maximum power in the low frequencies is required from a minimum amount of space. In fixed installations, iS115-O's reduced dimensions enable unobtrusive installation in restricted environments, such as terraces, in queue of amusement park or integrated into decorations set up outside. These subwoofers are also perfect for distributed sound in large scale outdoor installations.

# APG

# iS115-O

## Technical Specifications

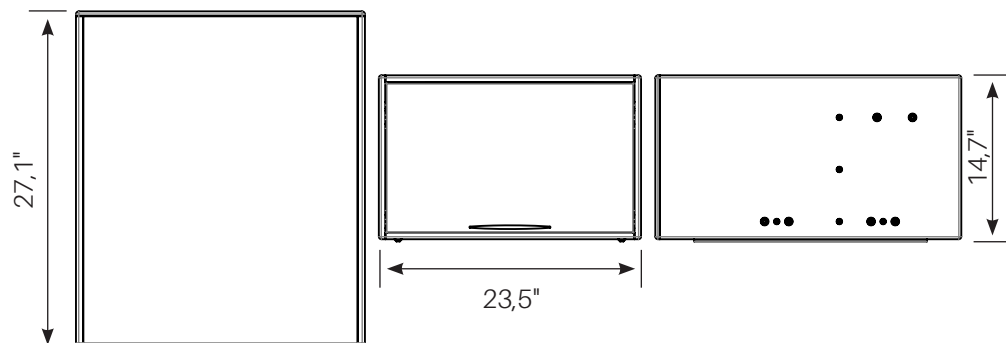

### Features

### iS115-O

Description	Compact subwoofer
Bandwidth ( $\pm 10$ dB)	42 Hz - 120 Hz
SPL max @1m	138 dB SPL (1)
Nominal directivity ( $H^\circ \times V^\circ$ )	Omnidirectionnal (2)
Nominal impedance	8 ohm

### Components

Transducers	1 x 15" Neodyme
Topology	-
Type of load	Bass Reflex
Way and amplification section	1 way, mono amplified

### Power

AES	900 W (3)
Maximum power handling	3600 W (4)

### Construction

Cabinet / Painting	15 mm Finnish Birch plywood / Black impact resistant polyurethane
Dimensions H, L, P (mm)	14,7" x 23,5" x 27,1" (375 x 598 x 690 mm)
Weight (kg)	72 lb (32,7 kg)
Connectors	1 x Gland kit connector
Handles	-
Front face	2,5mm acoustically transparent perforated steel
Fittings	-
Color	Black RAL 9005
IP	54

### Options & Accessories

COL	Specific RAL color option
-----	---------------------------

### Electronics

Processors	DMS48F, DMS48F_D*
Amplifiers	DA8, DA12 / QUATTROCANALI

D\* : Dante Option

- (1) Peak level @ 1m AES2-2012 2msr using 12dB crest factor pink noise with APG preset
- (2) Nominal directivity @-6dB
- (3) Continuous power according to AES2-2012 in DCR
- (4) Peak power according to AES2-2012 in DCR

Diffusion : April 2023 / DOP\_1751\_A

APG has a comprehensive research and development policy for the continual improvement of its products and service.

Due to this, new materials, manufacturing methods and technological changes may be introduced without prior notice. As a result, an APG product can differ from its published description in certain areas. However, unless otherwise indicated, its characteristics will always equal or better the published specifications.

**5 YEARS WARRANTY** \*A five years warranty covers passive filters, transducers and compression drivers. The warranty does not cover cosmetic damages and damages due to misuse, improper installation, or damages caused by alterations.

**APG**

ARBANE GROUPE - 8 Rue Johannes Gutenberg 44340 BOUGUENNAIS - FRANCE  
Tel. : +33 (0)2 40 46 66 64 - e.mail : contact@apg.audio - www.apg.audio

**arbane**  
groupe