

# TOURACK

## Universal amplification solution

TOURACK is part of the universal solution of APG amplification intended for the world of entertainment, touring and performance halls wishing to comply with Live operating standards.

The TOURACK can be used for all live sound applications in the APG range, from the smallest speakers to complete sound reinforcement systems.

The TOURACK consists of the following components:

- 8U flight case - 60 x 60 x 60 cm, with casters and sliding doors
- 32A single-phase electrical distribution panel
- Front-panel connection ports (I/O + network)
- Empty space on the front panel free for switch / router.

The TOURACK is directly compatible with the UNIRACK and allows it to support all I/O configurations from 8x8 to 12x12 on a single 32A mono power supply, offering great flexibility of use.

All audio wiring is routed through the front panel for greater clarity and easier interaction with the touchscreens on the DA Series amplifiers.

All connectors comply with Neutrik's "D Series Universal" standard to ensure the durability required for live and touring applications and interoperability with existing equipment.

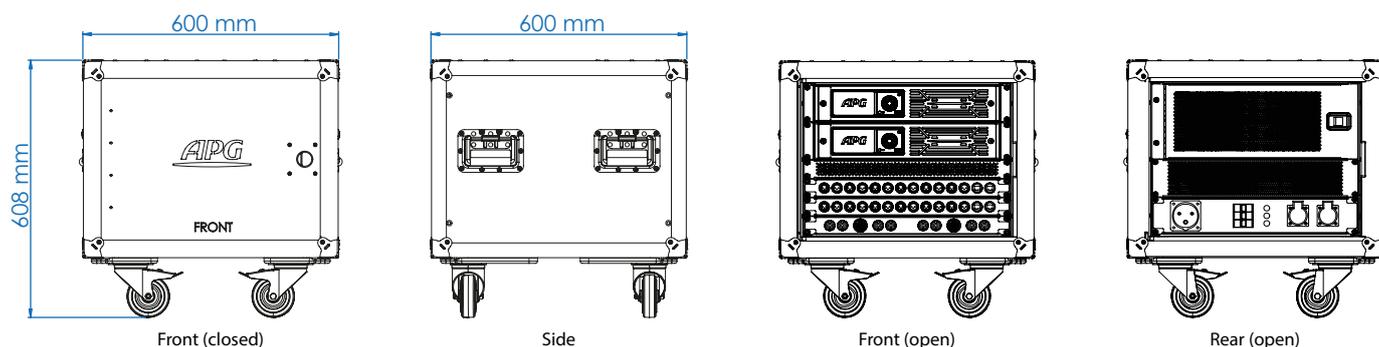


Illustration - Tourack equipped with DA12 amplifier

**APG**

# TOURACK

## Technical Specifications



### Specifications :

#### Inputs

Analog	8 female XLR connectors
	8 male XLR connectors (LINK)
Digital AES3	4 female XLR connectors (8 audio channels)
	4 male XLR connectors (LINK)
Digital DANTE / AES67	4 Ethercon™ (8 audio channels)

#### Outputs

8 Speakon™ NL4	(8 speaker channels)
2 Speakon™ NL8	(8 speaker channels)
8 Dante/AES67 TX	(via Ethernet connectors)

#### Power supply

Input power connector	1x P17 - 32A Mono
Output power connector	2x PC 10A (CEE 7/3 - Type F) for both amplifiers <sup>(1)</sup> (cable gland)
	2x auxiliary connectors PC (CEE 7/3 - Type F) for powering :
	* 1x UNIRACK (10A)
	* 1x accessory (2A max) - computer / switch <sup>(2)</sup>

#### Components

TOURACK	Flight case 8U
RPAL32M	32A single-phase electrical distribution panel
RP1UMI-DA1	DA Input patch for Unirack and Tourack amplifier 1 <sup>(1)</sup>
RP1UMI-DA2	DA input patch for Tourack amplifier 2 <sup>(1)</sup>
RP1UMO4	Output patch for Unirack and Tourack amplifier 1 <sup>(1)</sup>
RP1UMO8	Output patch for Tourack Amplifier 2 <sup>(1)</sup>

#### Construction and physical characteristics

Dimensions (H, W, D) (mm)	610 x 600 x 600
Weight (kg)	64 kg (fully equipped with 2x DA12 amplifiers <sup>(1)</sup> )
Handles	4 Flight Case Handles
Doors	Sliding Doors
Suspension	Silent Blocks
Stainless Steel Top Panel for specific information from the live service provider	

(1) Amplifiers sold separately. The power distribution panel, connection panels, and flight case cannot be sold separately and are sold as a single "TOURACK" unit.

Rack designed to hold only DA Series amplifiers (DA8/DA12) inside, excluding any other amplifier models.

(2) Ethernet switch and router not included.

**5 YEARS WARRANTY** A five-year comprehensive warranty covers filters and transducers against any manufacturing defects under normal product use.

Release Date: March 2026 / DOP\_1829\_C

APG maintains a policy of continuous research and development aimed at improving its products. For this reason, new materials, manufacturing methods, and design changes may be introduced without prior notice. As a result, an APG product may differ in certain respects from its published description; however, unless otherwise specified, its specifications will be equal to or exceed those published.

**APG**

ARBANE GROUP - 8 Rue Johannes Gutenberg, 44340 BOUGUENAI - FRANCE  
Tel.: +33 (0)2 40 46 66 64 - Email: contact@apg.audio - www.apg.audio

**arbane**  
groupe